

SAS™ SCORPION™ ENGINE PULLER FOR AUTO RECYCLERS



Made in USA



INCREASE CASH RECOVERY FROM YOUR RECYCLING OPERATIONS.

FAST & SIMPLE INSTALLATION

- Fits direct pin mount and quick coupler equipped machines
- Only requires 1 auxiliary spool

GENERATE REVENUE:

- Process end of life vehicles in less than 60 seconds.*
- Pull scrap engines and transmissions in 30 seconds.*
- 30%* more revenue by separating metals from bodies.
- 1000%* more revenue per lb. on wire harness from engine compartment & dash.
- 80% more visibility with a direct line of site from the operator's window through the forks.
- Cycle time less than 15 seconds from park to full extension.*
- Serviceable for long life. Replace blades in 3 hours or less on Class 30 Scorpion.

ENGINEERED & BUILT FOR OPTIMUM PERFORMANCE:

- ENGINEERED TOUGH for continuous prying & durability.
- Hardened pins, bushings and grease-able pivot points for extended service life.
- Hydraulic hoses & cylinders are protected to minimize potential damage from sharp objects.
- Built with high strength blades & Class 30 Scorpion has carriage skid plates for extended service.
- Clean up of ground debris is a snap with center plow blade.(SC20)
- Speed is paramount in this design. Operator uses grapple from the cab. No torches, no personnel needed to hook up chains to pull or move engines. Safer, quicker & less costly removal of engines & transmissions.

SAS FORKS are trusted to handle over 12 Million lifts annually!

VIDEO ONLINE:

- www.sasforks.com/scorpion


BEST SUITED FOR:

- Wheel loader with 3rd hydraulic spool, 2,500-4,000 PSI, 15-40 GPM, ≥3/4" ID lines
- 22,500 to 29,999 lbs. wheel loader curb weight; Class 20 (attachment 5,250#) (blade cap. 22,500# @2' L/C)
Class 20 attachment width limits: Pin Mount 45" Max. outside to outside on machine arm pin bosses. Quick Coupler frame 48" Max. outside width.
- 30,000 to 39,999 lbs. wheel loader curb weight; Class 30 (attachment 6,450#) (blade cap. 27,400# @2' L/C)
Class 30 attachment width limits: Pin Mount 55" Max. outside to outside on machine arm pin bosses. Quick Coupler frame 58" Max. outside width.
- 40,000 to 49,999 lbs. wheel loader curb weight; Class 40 (attachment 7,000#) (blade cap. 34,200# @2' L/C)
Class 40 attachment width limits: Pin Mount 55" Max. outside to outside on machine arm pin bosses. Quick Coupler frame 58" Max. outside width.

(*estimated only)



SCORPION™ ENGINE PULLER FOR AUTO RECYCLERS

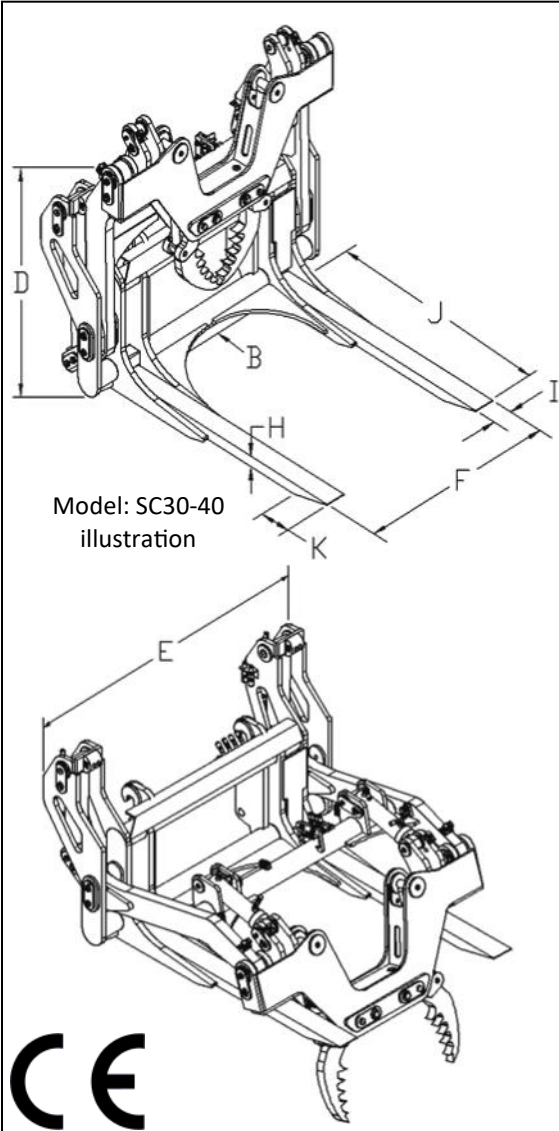

Item	CLASS 20 22-29k#	CLASS 30 30-39k#	CLASS 40 40-49k#
A-Wheel Loader Curb Weight	22-29k#	30-39k#	40-49k#
B-EXTRA WORK			
Center Clean Up Plow	yes	yes	yes
Side Pressure Plate	no	yes	yes
C-EXTENDED SERVICE			
Carriage Skid Plates	no	yes	yes
D-LOAD TIP BACK PROTECTION			
Back Height	60"	60"	60"
E-LOAD STABILIZATION			
Overall Width	70"	84"	84"
F-Fork Spacing Outside to Outside (fixed)	63"	60"	60"
G-Blade Solid Steel	A514	Forged	Forged
H-Blade Thickness x Width	3" x 7"	3" x 6"	3.5" x 6"
J- Blade Useable Length Measured from vertical carriage face to tip.	84"	84"	84"
K- Blade Taper Length	10"	12"	12"
L- Blade Taper Facing	up/or/down	down	down
M- Installation Pins	no	no	no
N- Color	Yellow	Yellow	Yellow
O-Electrical Requirements	24 volt	24 volt	24 volt
P- Joystick Configuration	Std /or/ Int	Std /or/ Int	Std /or/ Int
Pictures of existing joystick required if integrated.			
Q-Hydraulic Requirements existing on loader:			
-Separate "Std" auxiliary control lever. (Machines with single joystick integrated "Int" with 1st, 2nd & 3rd spools require engineering review, special quote & extra costs)			
-Min 2,500 PSI & 15 GPM, Max 4,000 PSI. Recommended 3,500 PSI & 35 GPM			
-Min 3/4" inside diameter auxiliary lines to front of loader arms			
-Customer to supply hoses from machine to Scorpion.			
Customer Sign X:	_____		Date: ___/___/___
Company Name:	_____		
Measurements may vary for engineering, if critical please note as "critical".			

Contact:

0-SC BWQ#

SAS Forks

133 Center Drive HWY 54 - PO Box 260
Luxemburg, WI 54217-0260 U.S.A.
Phone: 920-845-2307 Fax: 920-845-2309
Email: sales@sasforks.com
Website: www.sasforks.com



CAPACITY CONSIDERATIONS Load Center: _____

Machine capacity? _____ # @ _____

Max Load desired? _____ # @ _____

Machine curb weight? _____ #

TOOL OR PALLET POCKET RESTRICTIONS

Pocket Spacing: Outside to outside _____"

Pocket Opening: Height _____" Width _____"

MACHINE: Make _____ Model _____

Voltage 24 Volt 12 Volt

"Std" 3rd Spool Separate Lever Yes No

"Int" Integrated 1, 2, & 3rd Spool Joystick Yes No

Attachment: 3 Pin, 4 Pin, Quick Coupler:

Mfg _____ Series _____ S/N _____



133 Center Drive Hwy 54 • P.O. Box 260 • Luxemburg, WI 54217 • sasforks.com • Phone: (877) 727-3675 (877-sasfork)

We are TENAMEC—where tenacious and mechanical fuse. TENAMEC is proud to create the world's most durable material handling solutions under the Builtrite, SAS Forks and Lemco brands.

