## **Two-Ram Series**

**Horizontal Balers** 





INTERNATIONAL BALER CORPORATION

## Features:

IBC offers an extremely diverse line of Two-Ram Balers. From mid-sized 8" Bore units geared toward smaller volume applications, to our big 13" Bore units that can handle much larger volumes and non-ferrous materials. IBC has a Two-Ram unit to fit your requirements.


## **Two-Ram Series**

- Heavy duty welded construction
- T8 & T10 Regen Hydraulic System
- Integrated disconnect providing for lock-out/tag-out procedures
- · Adjustable shear blade
- Fully Automatic Baling
- Multi-material capabilities
- PLC equipped electrical panel <u>UL Listed</u>
- · Easy to operate "touch screen" controls
- Adjustable photo cell control
- Meets or exceeds all current ANSI Z 245.5 safety standards
- Quick material change over
- Our exclusive "removable" chamber wall
- Baler door system

TR-830

Chamber Wall'

Additional Innovative Features

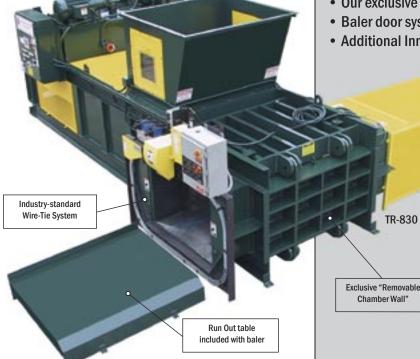



Available touch-screen controls and remote operator's stand simplify operation.

| SPECIFICATIONS |              |            |                            |                          |                           |                      |                            |                                       |                       |
|----------------|--------------|------------|----------------------------|--------------------------|---------------------------|----------------------|----------------------------|---------------------------------------|-----------------------|
|                | Bale Size    | Main Motor | Oil Reservoir<br>(gallons) | Main<br>Cylinder<br>Bore | Eject<br>Cylinder<br>Bore | Total Forve<br>(lbs) | Ram Face<br>Pressure (PSI) | Cycle Time<br>(no load)<br>in seconds | Shipping Weight (lbs) |
| TR-830         | 30 X 45 X 60 | 30 HP      | 165                        | 8                        | 8                         | 150,796              | 90                         | 18                                    | 30,500                |
| TR-950         | 30 X 45 X 60 | 50 HP      | 240                        | 9                        | 8                         | 190,852              | 112                        | 18                                    | 35,000                |
| TR-1052-75     | 30 X 45 X 60 | 75 HP      | 435                        | 10                       | 8                         | 235,620              | 196                        | 16                                    | 52,000                |
| TR-1170-75     | 30 X 45 X 60 | 75 HP      | 435                        | 11                       | 9                         | 285,100              | 169                        | 20                                    | 54,000                |
| TR-1170-100    | 30 X 45 X 60 | 100 HP     | 500                        | 11                       |                           | 285,100              | 169                        | 16                                    | 56,000                |
| TR-1270-150-HS | 30 X 45 X 60 | 150 HP     | 875                        | 12                       | 9                         | 361,900              | 218                        | 11                                    | 60,000                |
| TR-1288-150-HS | 30 X 45 X 60 | 150 HP     | 875                        | 12                       |                           | 361,900              | 218                        | 14                                    | 88,000                |
| TR-1388-150-HS | 30 X 45 X 60 | 150 HP     | 875                        | 13                       | 9                         | 424,744              | 257                        | 15                                    | 94,000                |







## INTERNATIONAL BALER CORPORATION

5400 Rio Grande Avenue, Jacksonville, Florida 32254 P.O. Box 6922, Jacksonville, Florida 32236 (904) 358-3812 \* (800) 231-9286 \* Fax (904) 358-7013